

BOUNDLESS COOLING POSSIBILITIES

WITH OUR ENGINEERED FOR EXCELLENCE FREEZER
BY D&V EXPORTS



Hard Top Freezers



DV070H161

Volume: 72 Liters
Dimensions (mm): 535 (W) x 518 (D) x 841 (H)
No. of Baskets: 1
 Convertible
Insulation: 60mm Polyurethane



DV150H164

106 Liters
 635 (W) x 540 (D) x 885 (H)
 1
 Convertible
 70mm Polyurethane



DV225H122

190 Liters
 760 (W) x 695 (D) x 840 (H)
 1
 Convertible
 60mm Polyurethane



DV300H124

220 Liters
 933 (W) x 612 (D) x 890 (H)
 1
 Convertible
 70mm Polyurethane



DV300H224

224 Liters
 933 (W) x 612 (D) x 890 (H)
 1
 Convertible
 70mm Polyurethane



DV325H223

301 Liters
 1060 (W) x 695 (D) x 840 (H)
 1
 Convertible
 60mm Polyurethane

Temperature Range: Freezer application: <-17°C, Cooler application: <10°C

Convertible Technology: Freezer or Cooler



DV350H225


Volume: 282 Liters
Dimensions (mm): 1205 (W) x 612 (D) x 840 (H)
No. of Baskets: 1
 Convertible
Insulation: 70mm Polyurethane

DV375H225

Volume: 306 Liters
Dimensions (mm): 1205 (W) x 612 (D) x 890 (H)
No. of Baskets: 1
 Convertible
Insulation: 70mm Polyurethane

DV475H224

Volume: 444 Liters
Dimensions (mm): 1360 (W) x 695 (D) x 880 (H)
No. of Baskets: 2
 Convertible
Insulation: 60mm Polyurethane

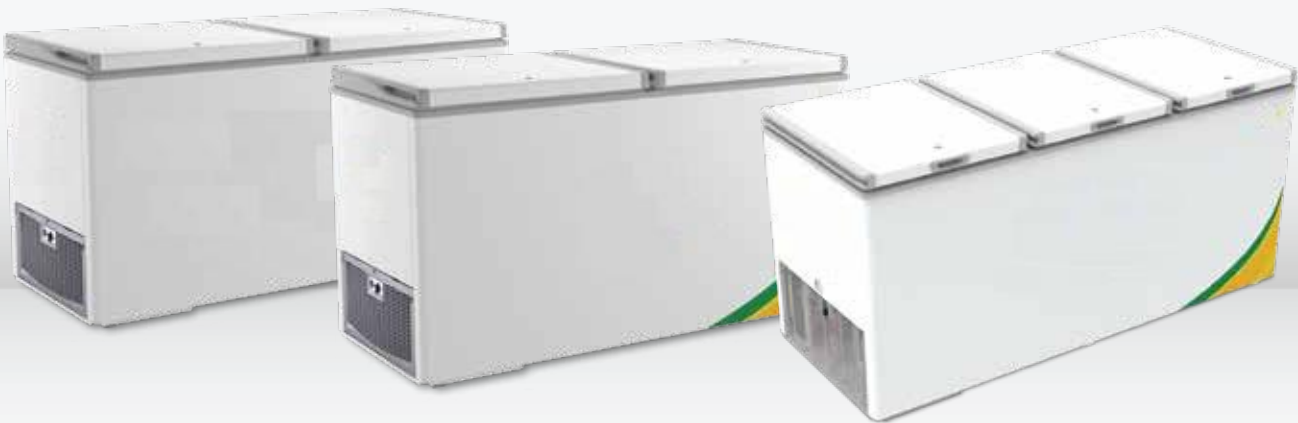

DV525H224

Volume: 505 Liters
Dimensions (mm): 1606 (W) x 695 (D) x 840 (H)
No. of Baskets: 2
 Convertible
Insulation: 60mm Polyurethane

DV550H225

Volume: 527 Liters
Dimensions (mm): 1666 (W) x 695 (D) x 848 (H)
No. of Baskets: 2
 Convertible
Insulation: 60mm Polyurethane

DV625H225

Volume: 568 Liters
Dimensions (mm): 1666 (W) x 695 (D) x 900 (H)
No. of Baskets: 2
 Convertible
Insulation: 60mm Polyurethane

DV875H325

Volume: 722 Liters
Dimensions (mm): 1860 (W) x 780 (D) x 908 (H)
No. of Baskets: 1
 Convertible
Insulation: 60mm Polyurethane

Glass Top Freezers



DVF250GL25

Volume: 192 Liters
Dimensions (mm): 760 (W) x 695 (D) x 882 (H)
No. of Baskets: 1



DVF350GL25

Volume: 311 Liters
Dimensions (mm): 1060 (W) x 695 (D) x 882 (H)
No. of Baskets: 1



DVF450GL25

Volume: 422 Liters
Dimensions (mm): 1360 (W) x 695 (D) x 882 (H)
No. of Baskets: 2



DVF550GL25

Volume: 536 Liters
Dimensions (mm): 1650 (W) x 695 (D) x 882 (H)
No. of Baskets: 3

Temperature Range: <-17°C | **Insulation:** 60mm Polyurethane

Curved Glass Top Freezers



DVF325GC23

Volume: 284 Liters
Dimensions (mm): 1095 (W) x 644 (D) x 888 (H)
No. of Baskets: 2



DVF425GC23

Volume: 350 Liters
Dimensions (mm): 1296 (W) x 644 (D) x 888 (H)
No. of Baskets: 3

Temperature Range: <-17°C | **Insulation:** 60mm Polyurethane

Hatched Door & Hard Top Eutectic Freezers



	DVE325H220	DVE425H220	DVE425D220	DVE525D320
Volume:	253 Liters	351 Liters	351 Liters	440 Liters
Dimensions (mm):	1060 (W) x 695 (D) x 840 (H)	1360 (W) x 695 (D) x 840 (H)	1360 (W) x 695 (D) x 920 (H)	1600 (W) x 695 (D) x 920 (H)
No. of Baskets:	1	2	N.A.	N.A.
Temperature Range:	<-17°C	<-17°C	<-17°C	<-17°C
Insulation:	80mm Polyurethane	80mm Polyurethane	80mm Polyurethane	80mm Polyurethane

Glass Top Eutectic Freezers

Scooping Freezers



DVE425GT20

Volume:	354 Liters
Dimensions (mm):	1360 (W) x 695 (D) x 795 (H)
No. of Baskets:	2
Temperature Range:	<-17°C
Insulation:	80mm Polyurethane

DVF450GT25

Volume:	422 Liters
Dimensions (mm):	1360 (W) x 695 (D) x 1226 (H)
No. of Baskets:	3

DVF550GT25 Scooping

Volume:	536 Liters
Dimensions (mm):	1650 (W) x 695 (D) x 1226 (H)
No. of Baskets:	4

Temperature Range: <-17°C | **Insulation:** 60mm Polyurethane

Freezer on Wheels



DVG200H120

Volume: 117 Liters
Dimensions (mm): 940 (W) x 640 (D) x 785 (H)
No. of Baskets: N.A.

DVG250H120

142 Liters
940 (W) x 640 (D) x 905 (H)
N.A.

DVG300H220

206 Liters
990 (W) x 633 (D) x 890 (H)
N.A.

Temperature Range: <-17°C | **Insulation:** 60mm Polyurethane

Combi Freezers



DVB325H220

Volume: Freezer- 162 L / Cooler-123 L
Dimensions (mm): 1120 (W) x 695 (D) x 840 (H)
No. of Baskets: 1-Freezer Compartment

DVB425H220

Freezer- 162 L / Cooler-205 L
1360 (W) x 695 (D) x 840 (H)
1-Freezer Compartment

DVB525H220

Freezer- 215 L / Cooler-258 L
1610 (W) x 695 (D) x 840 (H)
1-Freezer Compartment

Temperature Range: Freezer application: <-17°C, Cooler Compartment: <10°C | **Insulation:** 60mm Polyurethane

Vertical Freezers



DVSRF205HC-GL

Volume: 138 Liters
Dimensions (mm): 514 (W) x 549 (D) x
1265 (H)
No. of Shelves: 03

DVSRF350HC1-GLI

341 Liters
623 (W) x 680 (D)
x 1790 (H)
04

DVSRF550HC-GLI

467 Liters
623 (W) x 715 (D)
x 2099 (H)
06

DVSRF555HC-GLI

467 Liters
623 (W) x 715 (D) x 2099
(H)
06

DVSRF900HC-GL

762 Liters
920 (W) x 780 (D) x
2128 (H)
10



D&VEXPORTS

ISO 9001:2015 Company

Corporate office: SCO308 Third Floor Raja Commercial

Vishwakarma Chowk GT Road Miller Ganj

Ludhiana Punjab -141003

Work: Plot No. 5 St. No. 9 Gopal Nagar Habowal Kalan

Ludhiana Punjab -141001

Whatsapp: +91-7528955722

Email : info@dnvexports.com

WebPage: www.dnvexports.com